

KELI CEE
CENTRAL & EASTERN EUROPE

AMIQ

50-250kg

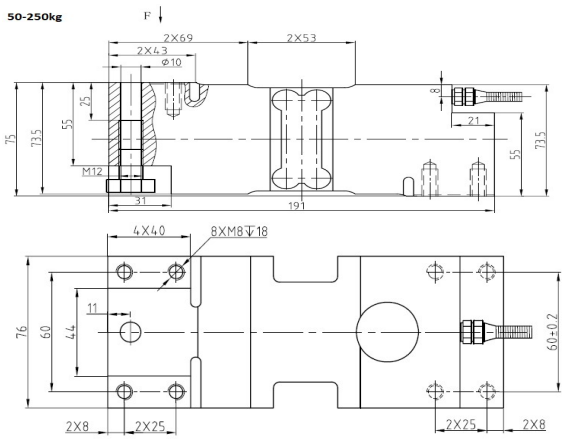

300kg-1t

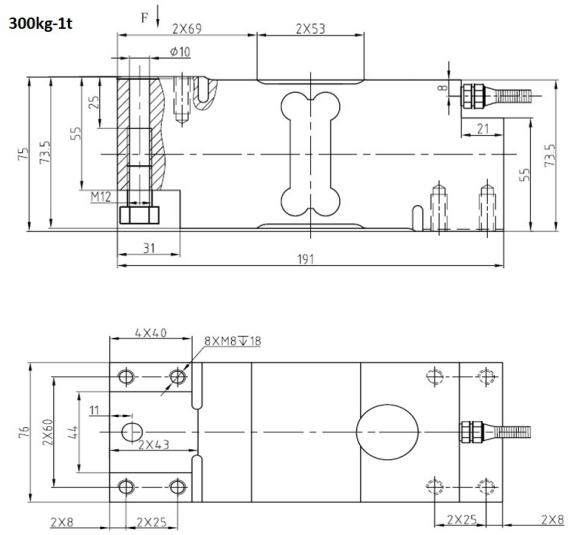

Ratedload		kg	300,500, 635, 750, 1t
Sensitivity		mV/V	2.0±0.2
Accuracy class			C3
Creep(30min)		ppm	±166
Zero balance		Emax	±3%
TCO		ppm /℃	±17.5
TC SPAN	+20~40℃	ppm /℃	±17.5
	-10~+20℃		±11.67
Input resistance		Ω	404±15
Output resistance		Ω	350±3
Insulation resistance		MΩ	≥2000
Operating Temp Range		℃	-20~+50
Safe load limit		%F.S	150
Lateral load limit		%F.S	200
Recommend excitation		V DC	10
Maximum excitation		V DC	15
Protection class		IP65	
Construction		Aluminum	
Cable		Length : 6m Diameter :Ø5mm	
Max.platform size		600X800mm	

Ratedload		kg	50,75, 100, 150, 200, 250
Sensitivity		mV/V	2.0±0.2
Accuracy class			C3
Creep(30min)		ppm	±166
Zero balance		Emax	±3%
TCO		ppm /℃	±17.5
TC SPAN	+20~40℃	ppm /℃	±17.5
	-10~+20℃		±11.67
Input resistance		Ω	404±15
Output resistance		Ω	350±3
Insulation resistance		MΩ	≥2000
Operating Temp Range		℃	-20~+50
Safe load limit		%F.S	150
Lateral load limit		%F.S	200
Recommend excitation		V DC	10
Maximum excitation		V DC	15
Protection class		IP65	
Construction		Aluminum	
Cable		Length : 6m Diameter :Ø5mm	
Max.platform size		600X800mm	

KELI CENTRAL & EASTERN EUROPE Kuroszczyk Sp.k
Przeskok 53, 63-400 Ostrów Wielkopolski
Tel.: 62 592 42 78, **e-mail:** info@keli-cee.
NIP: 622-273-15-17
REGON: 301375106 KRS: **0000988688**