
7.AUTOMOBILE SPEEDOMETER TESTER>>>

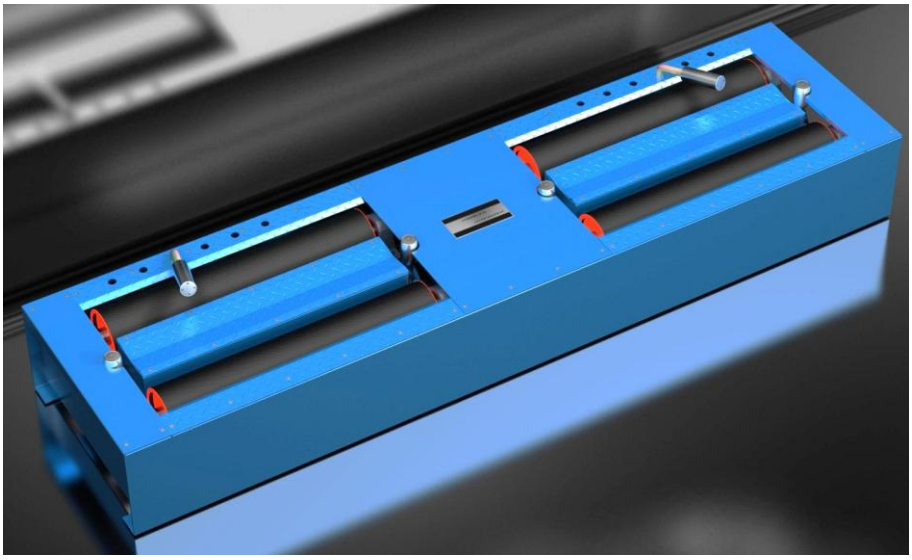

Functions:

- To detect speedometer indication error, odometer indication error(optional), taximeter indication error(optional).

Applicable Place:

- Motor Vehicle Safety Performance Inspection Station
- Automobile Manufactory

Technical Features:

- Knurling and zinc coated roller surface, high adhesion coefficient, high abrasion resistance.
- High-precision dynamic balance roller, running smoothly, less vibration.
- High-precision encoding sensor, working stably and precisely.
- Use the auxiliary wheel-rolling limiter for protecting the test process safely.
- The standard communication interface, easy to access network.

ITEM	TECHNICAL PARAMETER			
MODEL	CS-030A	CS-100C	CS-130C	CS-180A
Rated Axle Load,t	3	10	13	18
Test Range,km/h	0~120			
Max.Test Speed,km/h	130			
Scale Value,km/h	0.1			
Indication Error,%	±1			
Track Width,mm	700~2550	700~3100		800~3200
Roller Diameter,mm	190	215		320
Roller Surface	zinc coated			
Working Air Pressure,MPa	0.7			
Lift Type	air bag			
Dimension(LxWxH),mm	2980x800x375	3526x860x420	3526x860x420	3720x1100x561
Weight,t	0.75	1.25	1.35	2.3