
ACCESSORIES

BJ-8-206

Stainless steel foot, assembled with: BM8H, H8H.





SHORT DESCRIPTION

Easy installation, self-centralization, anti-side loading and height adjustable.


Capacity	Part number
0.25-2t	BJ-8-206-0.25/2t
500lb-4klb	BJ-8-206-500lb/4K

Capacity	M
0.25t-2t	M12×1.75
500lb-4klb	1/2-20UNF

BJ-8-207

Stainless steel foot, assembled with: BM8H, H8H.





SHORT DESCRIPTION

Easy installation, self-centralization, anti-side loading and height adjustable.


Capacity	Part number
0.25t-2t	BJ-8-207-0.25/2t
5t	BJ-8-207-5t
500lb-4klb	BJ-8-207-500lb/4K
10klb	BJ-8-207-10K

Capacity	M
0.25t-2t	M12×1.75
5t	M20×2.5
500lb-4klb	1/2-20UNF
10klb	3/4-16UNF

HJ-8-217

Alloy steel foot with rubber, assembled with: BM8H, H8H.





SHORT DESCRIPTION

Easy installation, self-centralization, anti-side loading and height adjustable.


Capacity	Part number
0.25-2t	HJ-8-217-0.25/2t
500lb-4klb	HJ-8-217-500lb/4K

Capacity	M
0.25-2t	M12×1.75
500lb-4klb	1/2-20UNF

HJ-8-218

Alloy steel foot with rubber, assembled with: BM8H, H8H.



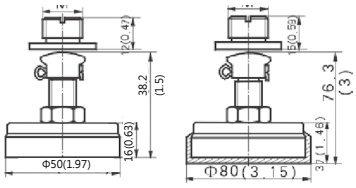

SHORT DESCRIPTION

Easy installation, self-centralization, anti-side loading and height adjustable.

Capacity	M
250kg-2t	M12×1.75
5t	M20×2.5
500lb-4klb	1/2-20UNF
10klb	3/4-16UNF

Capacity	Part number
0.25t-2t	HJ-8-218-0.25/2t
5t	HJ-8-218-5t
500lb-4klb	HJ-8-218-500lb/4K
10klb	HJ-8-218-10K

BM-8-406

Stainless steel foot, assembled with: BM8H, H8H.



Capacity	Part number
0.25-2t	BM-8-406-0.25/2t
5t	BM-8-406-5t

SHORT DESCRIPTION

- Compact construction, easy installation
- Excellent anti-reversal ability
- Anti-over loading ability
- Good self-aligning ability

Optional table		
Part number	Designation	Graphic
HM-8-401-1	Fixed	◯
HM-8-401-2	Half-floating	⟷
HM-8-401-3	Floating	✣

SPECIFICATIONs			
Capacity	t	0.25-2	5
Max. horizontal displacement	%FS	150	150
Max. anti-rotation	mm	±2.5	±3.5
Material	KN	3	10

Capacity / Dimension	0.25-2t 0.5-5klb	5t 10klb
L	177.8(7.0)	235(9.25)
L1	114.3(4.5)	152.4(6.0)
L2	152.4(6.0)	184.2(7.25)
L3	88.9(3.5)	101.6(4.0)
H	104.8(4.13)	136.5(5.37)
H1	25.4(1.0)	32(1.26)
H2	19(0.75)	25.4(1.0)
W	114.3(4.5)	152.4(6.0)
W1	88.9(3.5)	101.6(4.0)
D	11(0.43)	17.5(0.69)

